

The STV 25K DIN Rail Series - Surge Protective Devices


This series provides point-of-use protection, at the dedicated equipment level, against damaging transients. Ideal for installation in electronic control cabinets found in harsh industrial environments such as the factory floor or at remote locations. These devices provide 50,000 amps of surge protection, sinewave tracking, LED status indication and form "C" dry contacts. This DIN Rail series also provides protection on all electrical paths and comes with a standard ten year product warranty. The STV 25K DIN Rail series surge protective devices are UL recognized to Standard 1449, 2nd Edition.



Selection Table

Catalog Number	Input Voltage	
	STV 25K-10S	120 V
STV 25K-24S	240 V	Single Phase (L1 - L2)

Dimensions

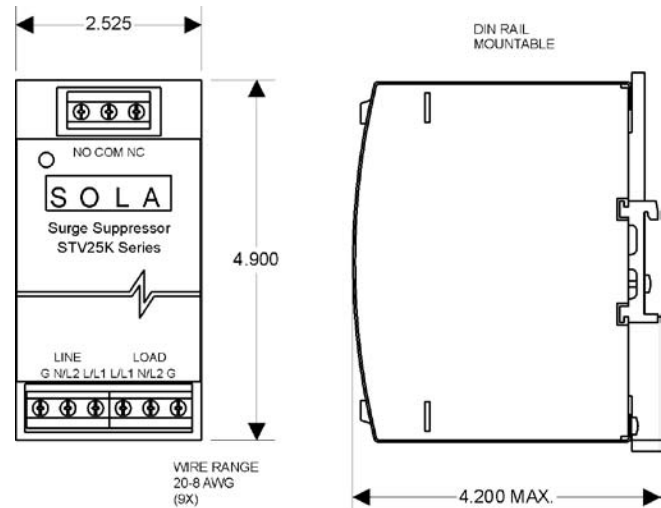

Applications (20 Amp Max)

- Control Cabinets for Industrial Automation
- Point-of-Use Industrial/Service Equipment
- Remote Commercial or Industrial Equipment
- Instrumentation and Large Test Equipment
- Commercial and Building Automation Systems

Features

- Compact and narrow design maximizes panel space.
- Low clamping levels for more effective protection.
- Easy access terminal screws for quick mounting and installation.
- 50,000 amps of surge protection.
- Sine wave tracking and all mode protection provide consistent and reliable protection on all electrical paths.
- Patented thermal fusing prevents MOV overheating caused by excessive current levels.

Related Products

- DIN Rail Power Supplies
- DIN Rail AC UPS
- Industrial Control Transformers
- Line Reactors
- Active Tracking® Filters

STV 25K Specifications

Description	Catalog Number	
	STV 25K-10S	STV 25K-24S
Input Voltage	120 Vac, Single Phase 0-135 VRMS	240 Vac, Single Phase 0-260 VRMS
Maximum Continuous Operating Voltage (MCOV)	120 Vac - 150 VRMS	240 Vac - 275 VRMS
Line Frequency	47-63 Hz	
Connection/Mounting Type	DIN Rail Mount (Chassis Mount Bracket Optional order SDN-PMBRK2) with screw terminals for #12 AWG.	
Input Current Rating	20 Amps	
Phase Configuration	2 wire + GND	
Weight – lbs (kg)	3 lbs/1.36 kg	
Dimensions (H x W x D)	4.87 x 2.5 x 4.375 (12.37 x 6.35 x 11.11) includes mounting bracket	
Modes of Protection	All Mode: L - N, L - L, L - G, N-G	
Safety Agency Approvals	UL 1449	
UL 1449 (2nd Edition) Suppressor Classification 120 Vac Normal/Common Mode 240 Vac Normal/Common Mode	400 Vac 800 Vac	
Status Indication	Green LED, Form C Contacts	
Packaging	Metal DIN Rail Mount Enclosure, IP20	
Response Time	< 0.5 nsec	
Operating Temperature	-40°C to +60°C	
Operating Humidity	0% to 95% Non-condensing	
	Noise Attenuation	
Normal Mode	50 dB Min	
Common Mode	40 dB Min	
	Peak Surge Current Capability (8 x 20 μs)	
Line to Neutral	25 kA	
Line to Ground	25 kA	
Neutral to Ground	25 kA	
Warranty	10 Years	